

# 118 Series

A07 - Wall to Wall  
A09 - Wall to Corner



**Movement Rating ± 25%**

## Product Guide



Thermal



Interior



Fire Rated  
Option



Vapor Barrier  
Option

- ▶ Seal absorbs thermal and limited seismic movement
- ▶ Dual durometer seal provides secure fit and optimal flexibility
- ▶ Standard and Custom seal colors available.
  - All seals achieve UL Environmental Greenguard Gold Certification for ultra low VOC's
- ▶ Flush mount frame reduces sightline
- ▶ Adaptable to any wall finish


Application	System	W		H1		H2		S		B		Movement +/-			
		Joint Width		Frame Height 1		Height 2		Sightline		Blockout		Horizontal		Vertical	
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm
Wall/Wall	118-A07-050	2"	50	*	*	*	*	1 7/8"	47	*	*	1/2"	13	1/2"	13
	118-A07-075	3"	75	*	*	*	*	2 7/8"	73	*	*	3/4"	19	3/4"	19
Wall/Corner	118-A09-050	2"	50	*	*	*	*	1 7/8"	47	*	*	1/2"	13	1/2"	13
	118-A09-075	3"	75	*	*	*	*	2 7/8"	73	*	*	3/4"	19	3/4"	19

IPC.835/REV.8


# 118 Series

## Flush Mount Wall Systems

118-A07 Wall/Wall  
(2" (50mm) system shown)

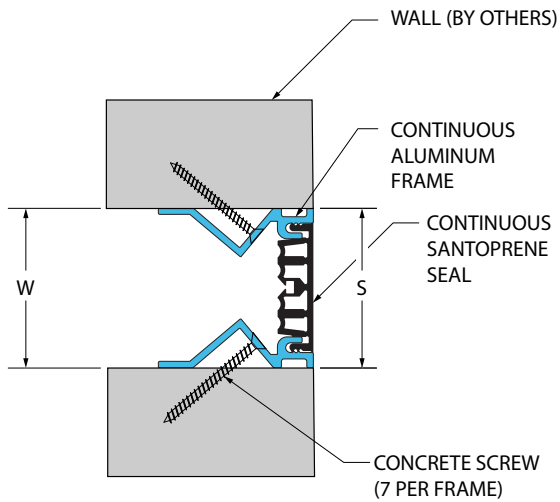


118-A09 Wall/Corner  
(2" (50mm) system shown)

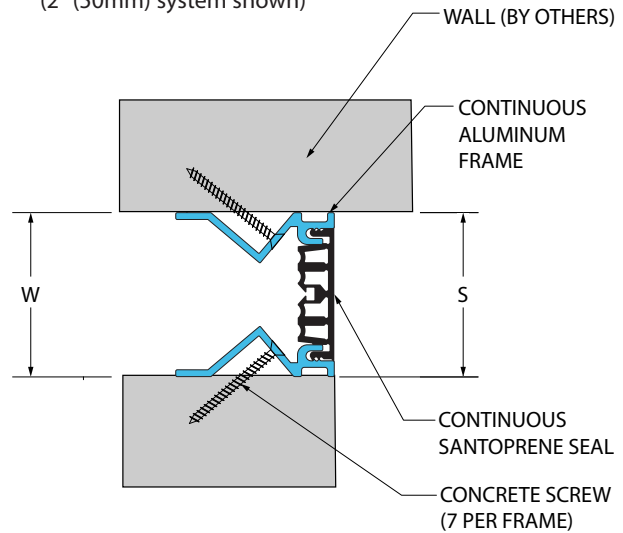

# 118 Series

## Options

118-A07 Wall/Wall With Fire Blanket  
(3" (75mm) system shown)

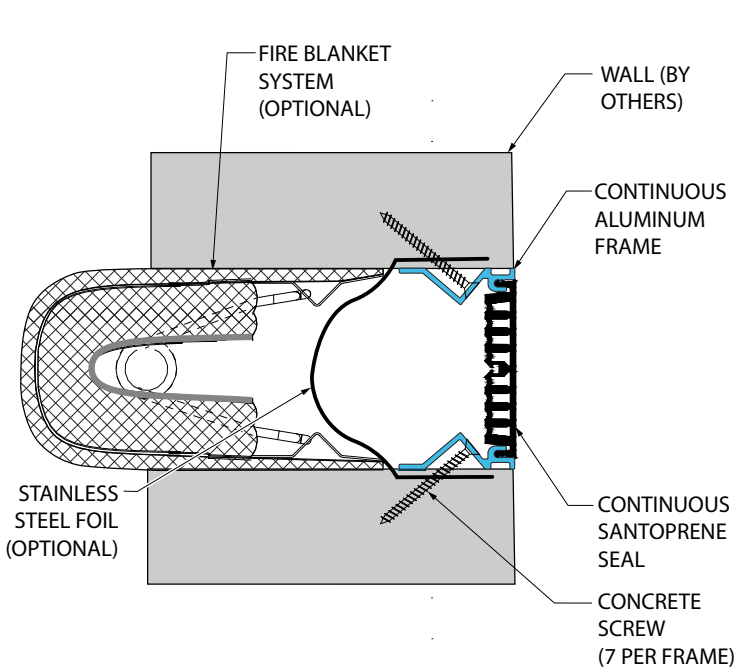

118-A07 Wall/Wall With Mineral Wool  
(2" (50mm) system shown)

