

Movement Rating ± 50%



- ▶ 1 5/8" (40mm) Deep pan ideal for floor finishes with increased depths such as marble, granite, limestone and paver systems
- Hinged pan rides up the canted frame under seismic movement then returns to position to maintain egress routes
- > System provides for unlimited lateral movement.
- Pan profile provides a vertical surface to abut tile against, eliminating the need to bevel flooring edges for flooring up to 3/8" [10mm].
- Symmetrical reveals align for Floor-to-Floor and Floor-to-Wall applications

- System is capable of reducing joint widths up to 8" (203mm) down to two 1" (27mm) sightline reveals.
- Narrow visual sightlines minimize aesthetic disruption to your space.
- Use sealant that matches the adjacent floor finish to further conceal the sightline reveals.


Application	System	W		H1		H2		S		В		Movement +/-			
		Joint Width		Frame Height 1		Height 2		Sightline		Blockout		Horizontal		Vertical	
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm
Floor to Floor	502-A01-050	2"	51	2"	51	5 1/2"	139	1 1/8"	30	9 3/8"*	238	1"	25	1"	25
	502-A01-100	4"	102	2"	51	5 1/2"	139	1 1/8"	30	7 3/8"	187	2"	51	2"	51
	502-A01-150	6"	152	2"	51	5 1/2"	139	1 1/8"	30	8 3/8"	222	3"	76	3"	76
	502-A01-200	8"	203	2"	51	5 1/2"	139	1 1/8"	30	9 3/8"	238	4"	102	4"	102
Floor to Wall	502-A02-050	2"	51	2"	51	5 1/2"	139	1 1/8"	30	9 3/8"*	238	1"	25	1"	25
	502-A02-100	4"	102	2"	51	5 1/2"	139	1 1/8"	30	7 3/8"	187	2"	51	2"	51
	502-A02-150	6"	152	2"	51	5 1/2"	139	1 1/8"	30	8 3/8"	222	3"	76	3"	76
	502-A02-200	8"	203	2"	51	5 1/2"	139	1 1/8"	30	9 3/8"	238	4"	102	4"	102

* 2" (75mm) Joint Width requires a stepped blockout of 1 1/2"x 7/8" [38x22mm]

* Larger sizes available, contact your Jointmaster sales representative for additional product offerings

IPC.1581/REV.7




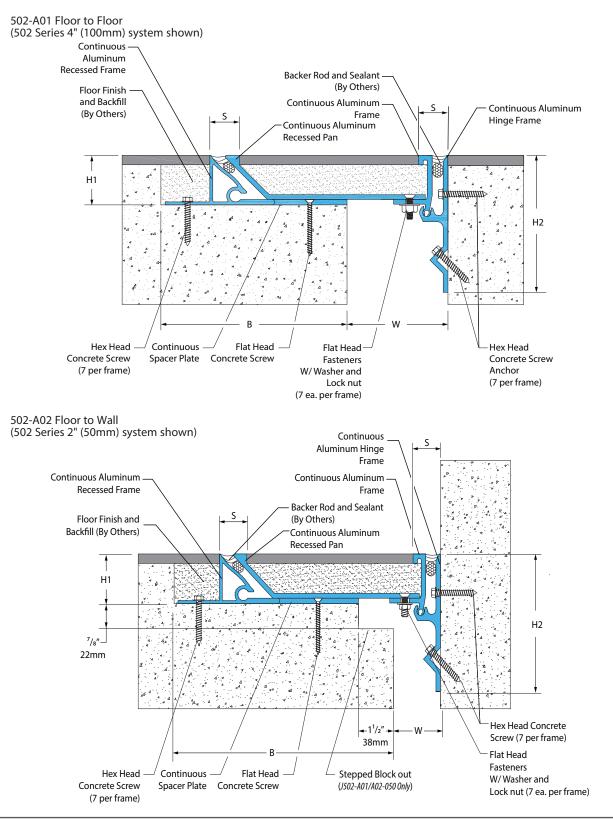

inpro.

502 Series

Vapor Barrier System (502 Series 4" (100mm) system shown)

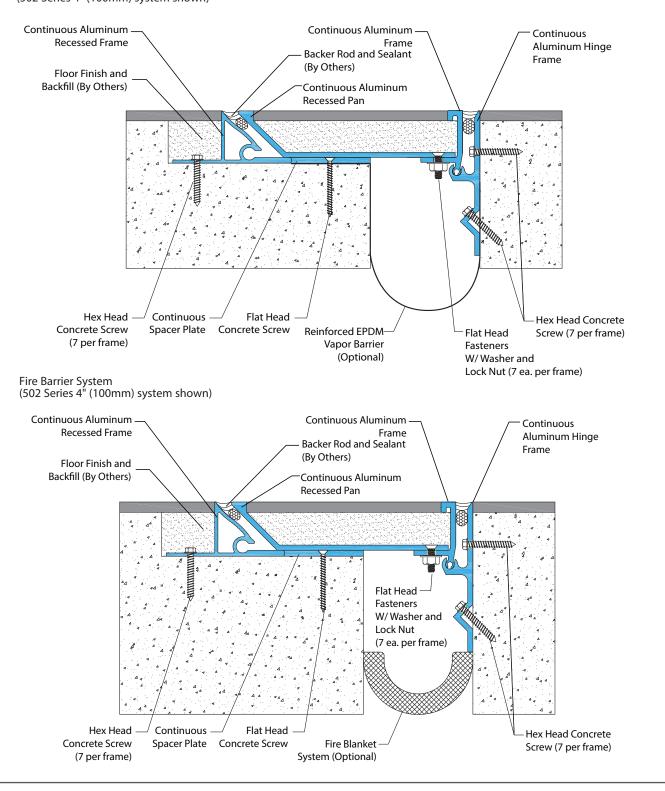

inpro.